

Technical Data Sheet *Model A4IN1P12*

V250218





Professional laser gun for clean welding processes.

REMOTE CUTTING / WELDING / CLEANING, WELDING BEAD

FORZA AURA revolutionized welding, offering an undeniable advantage over MIG, TIG, or electrode welding. Laser welding uses a beam of light to weld and doesn't rely on an electric arc, so you can create perfect welds without having to be an experienced professional.

Its main advantage is its small size and portability thanks to the air-cooling system that no longer requires water or a chiller, which means reduced operating costs.



Specific features

| <u>FEATURE</u> | <u>DETAIL</u> | | | |
|--|------------------------------|---------------------|--|--|
| Nominal laser power | 1200W | | | |
| Type of work allowed | SOLDIER | COURT | REMOTE CLEANING | |
| Maximum working thickness in | 3.5mm 9/64in | 1.8mm 1/16in | 0.07mm 2.8mils | |
| ASTM A36 (1) | 3.311111 3/04111 | | Oxide layer | |
| Maximum working speed at 0.7mm of ASTM A36 | 45 mm/s 1.8 in/s | 100 mm/s 3.9 in/s | 1800mm2 /s 2.8in2 /s | |
| | | | In oxide layer thickness 0.01mm 0.4mils | |
| Permissible working gas type: ARGON, NITROGEN, NITROGEN, AIR | | | NITROGEN, AIR | |
| Average gas flow required | 10L/min | 70L/min | 32L/min | |
| Type of consumer thread | Solid thread 0.8 to 1.6mm | - | - | |
| Interchangeable nozzles | 6 types (2) | 1 | _ (3) | |

- It is not recommended to scale the machine to this power if you plan to permanently work with thicknesses greater than the nominal. As the cut moves away from the nominal thickness, it will begin to show more pronounced lines and possible burrs. For greater thicknesses, purchase the higher-power model.
- 2. One of the welding nozzles is also used for cleaning the weld seam, this is detailed later.
- 3. Remote cleaning does not require an interchangeable nozzle, only the tube holding the nozzle is removed.





Special Features

Air Cooling System



The cooling system is air-based, so the use of water for chiller cooling is no longer necessary.

Quick Change Lenses




The gun's design allows for quick lens exchange depending on the type of work to be performed.

Ultra Portable



Its reduced size and weight thanks to the air cooling system, allows great portability of the machine.

Multifunction 4 in 1



The FORZA Aura machine allows the use of 4 functions: Welding, Weld seam cleaning, Cutting, Remote cleaning

Multiple Welding Types



By using the different nozzles, the machine allows you to perform different types of welding according to your needs.

Robot Gripper Option



An additional option is the use of a robotic arm for automated handling of the laser gun thanks to the input/output (I/O) communication port.



General Specifications

| SPECIFICATION | <u>DETAIL</u> |
|--|---|
| Model | FORZA AURA – A4IN1P12 |
| Laser Type/Laser Technology | Fiber Laser 1080nm ± 10nm |
| Laser source connection type | QBH |
| Type of operation | By CW pulses |
| Nominal power of Fiber laser | 1200 W |
| Fiber laser working power range 10%-100% (±0.5%) | |
| Stability at output power | ± 3% |
| Working frequency | 4 – 5000Hz |
| Source protection level | IP54 |
| Types of work | SOLDERING/CUTTING/CLEANING CORD/REMOTE CLEANING |
| Focusing system | Fixed |
| Type of gas to use in welding | Argon or Nitrogen |
| Type of gas to use in cutting | Argon, Nitrogen or Compressed Air |
| Type of gas to use for cleaning | Argon, Nitrogen or Compressed Air |
| | Welding: 15L/min |
| Average gas consumption | Cutting: 70L/min (Depending on thickness) |
| | Cleaning: 32L/min |
| Laser gun model | SUP 21 T |
| Average welding speed | ~20 mm/s 0.8 in/s (1)— |
| Maximum travel speed | 200 mm/s 7.9 in/s |



^{1.} The welding speed depends on the thickness of the material, the thickness of the weld and the type of material. In a general reference under similar conditions, it is 3 times faster than traditional welding (electrode, TIG, MIG).

| Depth of weld without filler | ÿ15% of thickness and ÿ 0.5mm 1/64in | | |
|---|--|---------------------------|------------|
| Depth of weld with filler | ÿ 1.2mm 3/64in | | |
| Weld thickness (Depending on the filler material) | 1 - 2mm 1/32 – 5/64in (2) | | |
| Maximum laser width in cleaning | 120mm 4.7in | | |
| Laser cutting width | 0.1mm ~ 3mm 0.12 | 2 in(3) _ | |
| Cutting precision | Depending on the t | hickness | |
| Recommended welding angle | 0-30° (4 <u>)</u> | | |
| Ideal welding angle | 15° | | |
| Command control | Horizontal touch screen | | |
| Process control | Button on gun | | |
| Maximum consumption of the laser source | 4,000 W | | |
| Maximum consumption of the wire feeder automatic | 200 W | | |
| Peak power consumption | 4,500 W | | |
| Average energy consumption | 2,700 W(5) | | |
| Working voltage | 220V/1ph 50Hz - 60 | Hz | |
| Maximum current per line | 23 A | | |
| | Up to 60°C (TW,UF) | Up to 90°C (THHW,THHN) | Voltage |
| Minimum wire gauge of the breaker box | 2 x 12AWG | 2 x 16AWG | 220VAC 1ph |
| | + 1 x 12AWG Ground | | |
| Recommended breaker for the machine | 25 A | | |
| FORZA Aura power cable length | 5m 16.4ft | | |
| Feeder power cable length 5m 16.4ft | | | |

^{2.} The thickness of the weld is related to the amount of material filler that is configured.

^{5.} Average consumption is calculated with 60% efficiency, this can increase depending on the work being done, this data is used for energy consumption in kWh



^{3.} The width of the cut is directly proportional to the thickness of the material, the greater the thickness, the greater the width of the cut.


^{4.} The tilt angle depends on the thickness of the cutting material and also the type of gas being used; the greater the thickness, the more the tilt angle can be affected.

| Gun cable length | 7m 23ft |
|-----------------------------------|--|
| Cooling method | Air cooled |
| Gas connection diameter | 6mm hose (Nylon) |
| Maximum gas inlet pressure | 10 bar |
| Recommended gas inlet pressure | ÿ6 bar |
| Weight of the professional gun | 0.7 kg |
| Equipment weight | 45 kg |
| Weight of equipment for transport | 50 kg |
| Team measurements | 350 x 704 x 536mm 1.2 x 2.3 x 1.8 ft |
| Automatic feeder measurements | 250 x 560 x 400mm 0.8 x 1.8 x 1.3 ft |
| Transport measures(6) | 520 x 870 x 960mm 0.5x9.5x1m |
| Relative humidity | < 85% |
| Working temperature | -10 to 40o C |
| Certifications | CE, RoHS |
| | Protective glasses for 1060nm |
| | KN95 mask |
| Required PPE (Not included) | Gloves |
| | Gas extraction system |
| | Full protective suit (optional) |


^{6.} The FORZA Aura is shipped in a single package with its Automatic Thread Feeder.



Machine measurements

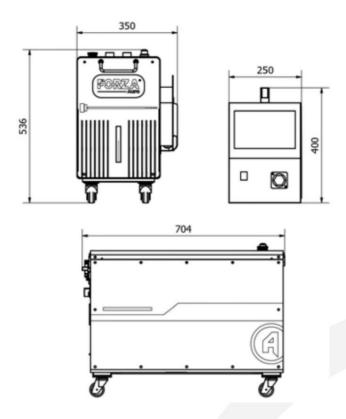


Space required

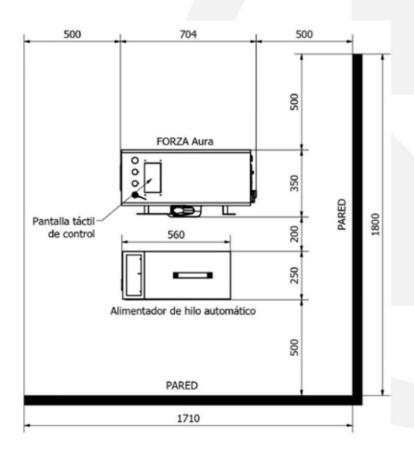



Applicable materials



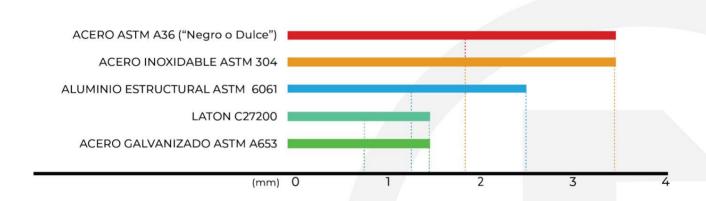

| MATERIAL MATERIAL | SOLSOMA DIE R | | COURT CORTE | | | |
|---|----------------------|---------------------|------------------|-----------------------|------------|---------|
| ASTM A36 STEEL ("Black or Mild") | mm | in 3.5mm 9/6 | Calibre | 1.8 mm 1/16 | in in | Calibre |
| ACERO ASTM A36 ("Negro o Dulce") ASTM 304 STAINLESS STEEL | 3.5 | 9/64 3.5mm 9/6 | 10 4in | 1.8 1.8 mm 1/16 | 1/16 in | 15 |
| ACERO INOXIDABLE ASTM 304 ASTM 6061 STRUCTURAL ALUMINI | 3.5 UM | 9/64 2.5mm 3/3 | 10 2in 1.25mm | 1.8 I 3/64in | 1/16 | 15 |
| ALUMINIO ESTRUCTURAL ASTM 6061 BRASS C27200 | 2.5 | 3/32 1.5 mm 1/ | 10 | 1.25).8 mm 1/32 | 3/64 in | 17 |
| LATÓN C27200 ASTM A653 GALVANIZED STEEL | 1.5 | 1/16 1.5 mm 1/ | 17 | 0.8 0.8 mm 1/32 | 1/32 in | 23 |
| ACERO GALVANIZADO ASTM A653 | 1.5 | 1/16 | 17 | 0.8 | 1/32 | 23 |



Packing List:

- 1 x FORZA AURA 1200W A4IN1P12 machine.
- 1 x SUP-21T multifunction pistol.



- □ 1 x 1200W Air cooling laser source
- 1 x Integrated CPU



□ 1 x Clamping Clap



-PERIPHERALS-

■ 1 x Automatic thread feeder



-CABLES, CONNECTORS AND DUCT-

5m x WeldFeed Control Cable



5m x WeldFeed Power Cable



5m x Cable 2x12 AWG + 1x12 AWG Machine power (T:Tip-Plug connection)



-CONSUMABLES / ACCESSORIES-

5 x Protective lens



7 x Welding/Cutting/Bead Cleaning Nozzles.



4 x Wire Feeder Nozzles



| Item | Measures | Net Weight | Gross Weight |
|------|----------------------------|------------|--------------|
| (1) | W: 520mm H: 960mm L:950mm | 45kg | 71kg |
| (2) | W: 250mm H: 400mm L: 560mm | 13.2kg | |







1 x Phillips screwdriver



1 x Flathead screwdriver 1 x Cotton swab case



1 x Cleaning cloths.



1 x 1080nm Protective Glasses



1 x QBH Protector



NOZZLE / BASES KIT:

| Photo | Model | Operation | |
|------------|----------------|--|--|
| | | FLAT WELDING | |
| A THE SAME | <u>AS-12</u> | INSIDE CORNER | |
| and the | | For 0.8/1/1.2mm wire | |
| | | FLAT WELDING | |
| | BS-16 | INSIDE CORNER | |
| - | | For 1.6mm wire | |
| | | WELDING | |
| | CS-12 | OUTSIDE CORNER | |
| | | For 0.8/1/1.2mm wire | |
| | | FLAT WELDING | |
| | ES-12 | OUTSIDE CORNER | |
| | | For 0.8/1/1.2mm wire | |
| | | FLAT WELDING | |
| | FS-16 | OUTSIDE CORNER | |
| | | For 1.6mm wire | |
| | С | CORNER WELDING EXTERIOR / CLEANING OF CORD | |
| | CUTTING NOZZLE | COURT | |
| C 0.8 | WIRE NOZZLE | WIRE FEED 0.8 | |
| 10 | WIRE NOZZLE | WIRE FEED 1.0 | |
| 12 | WIRE NOZZLE | WIRE FEED 1.2 | |
| 18 | WIRE NOZZLE | WIRE FEED 1.6 | |


NOTE: The included nozzle kit may vary depending on the equipment version.




Consumables:

| Photo | Model | Article | Measures | Life Time |
|-------|-----------------|--------------------|--------------|--------------|
| | CF-L18.0X2.0-4K | Lens of protection | D:18mm T:2mm | 200 hours |

Manufactured Parts:

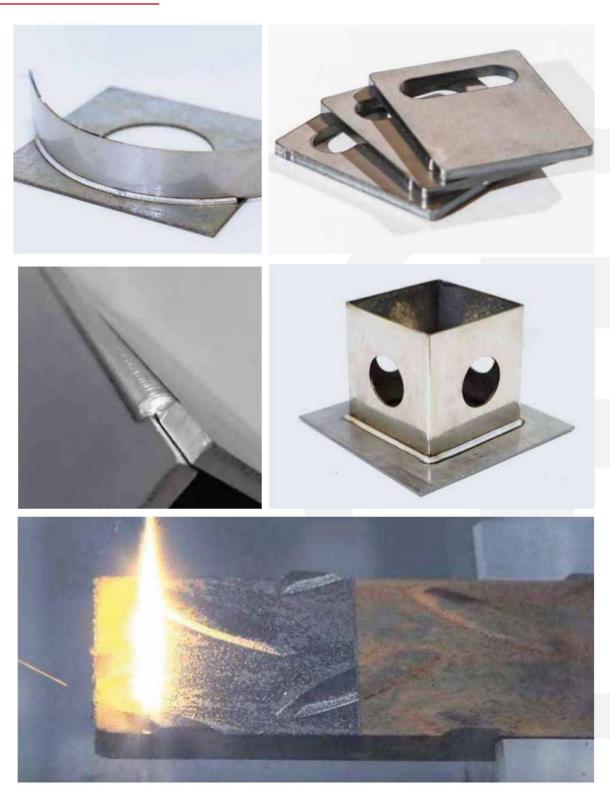

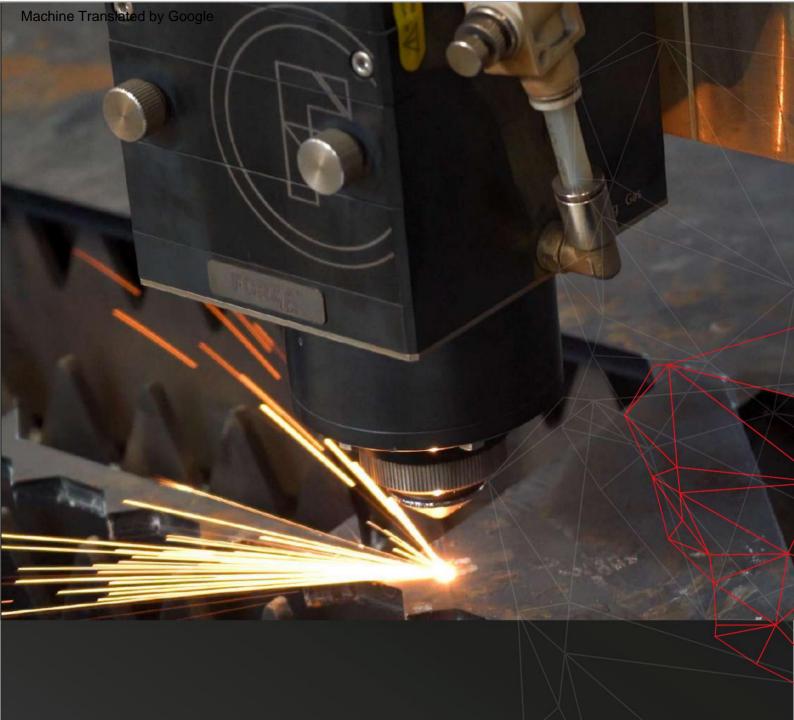

With Forza Laser laser specialists, our team has everything you need to grow your own business to the maximum.

Visit our social networks









forzalaser.com

