

DatasheetModel A4IN1P8





Professional Laser Gun for Clean Welding Processes.

CUTTING / WELDING / REMOTE CLEANING - WELD BEAD

FORZA AURA revolutionized welding, offering an undeniable advantage over MIG, TIG, or electrode welding. Laser welding uses a beam of light to weld and doesn't rely on an electric arc, so you can create perfect welds without having to be an experienced professional.

Its main advantage is its small size and portability thanks to the air-cooling system that no longer requires water or a chiller, which means reduced operating costs.



Main Features

FEATURES		DETAIL	
Laser power rating		800W	
Type of work allowed	WELDING	CUTTING	REMOTE CLEANING
Maximum working thickness in ASTM A36 ⁽¹⁾	7/70 in 10 France		0.03mm 1.2mils
Maximum working thickness in ASTM A36	3/32 in 2.5mm	3/64 in 1.5mm	Oxide layer
Maximum working speed at 0.7mm of ASTM A36	1.4 in/s 35 mm/s	2 in/s 50 mm/s	500mm²/s 0.8 in²/s
			0.01mm layer of oxide 0.4mils
Type of permissible working gas	ARGON, NITROGEN	NOTROGEN, AIR	NITROGEN, AIR
Average gas flow required	10L/min	70L/min	32L/min
Type of consumer thread	Solid wire 0.8 to 1.6mm	-	-
Interchangeable nozzles	6 types ⁽²⁾	1	_(3)

- 1. It is not recommended to scale the machine to this power if you plan to permanently work with thicknesses greater than the nominal. As the cut moves away from the nominal thickness, it will begin to show more pronounced lines and possible burrs. For greater thicknesses, purchase the higher-power model.
- **2.** One of the welding nozzles is also used for cleaning the weld seam, this is detailed later.
- 3. Remote cleaning does not require an interchangeable nozzle, only the tube holding the nozzle is removed.





Special Features

Air Cooling System



The cooling system is air-based, so the use of water for chiller cooling is no longer necessary.

Quick Change Lenses




The gun's design allows for quick lens exchange depending on the type of work to be performed.

Ultra Portable



Its reduced size and weight thanks to the air-cooling system, allows great portability of the machine.

Multifuction 4 in 1



The FORZA Aura machine allows the use of 4 functions: Welding, Welding Seam Cleaning, Cutting and Remote Cleaning.

Double Welding Types



By using the different nozzles, the machine allows you to perform different types of welding according to your needs.

Robot Gripper Option



An additional option is the use of a robotic arm for automated handling of the laser gun thanks to the input/output (I/O) communication port.



General Specifications

SPECIFICATION	DETAIL	
Model	FORZA Aura – A4IN1P8	
Laser Type/Technology	Fiber Laser 1080nm ± 10nm	
Laser source connection type	QBH	
Type of operation	By CW pulses	
Nominal fiber laser power	800W	
Fiber laser power range	10 to 100% (±0.5%)	
Output power stability	± 3%	
Laser working frequency	4 to 5000Hz	
Laser source protection level	IP54	
Laser source model	MSFC-800W AIR COOLING MAX PHOTONICS	
Working modes	CUTTING / WELDING / REMOTE CLEANING / BEAD CLEANING	
Focusing system	Fixed	
Auxiliar gas type for welding	Argon or N ₂	
Auxiliar gas type for cutting	Argon, N ₂ or Air	
Auxiliar gas type for cleaning	Argon, N₂ or Air	
	Welding: 10L/min	
Average gas consumption	Cutting: 70L/min (Depending on thickness)	
	Cleaning: 32L/min	
Laser gun model	Geffast - SUP 21	
Average welding speed (1)	~ 0.6 in/s 15 mm/s	
Maximum travel speed	7.9 in/s 200 mm/s	
Depth of weld without filler	≤15% of thickness and ≤ 0.5mm 1/64in	

^{1.} The welding speed depends on the thickness of the material, the thickness of the weld and the type of material. In a general reference under similar conditions, it is 3 times faster than traditional welding (electrode, TIG, MIG).



_				
Depth of weld with filler	≤ 3/64in 1.2mm			
Weld thickness (Depending on the filler material)	1/32 – 5/64in 1 – 2mm ⁽²⁾			
Maximum laser width in cleaning	4.7 in 120 mm			
Laser cutting width	0.004in ~ 0.1in 0.1mm ~ 3mm ⁽³⁾			
Cutting precision	Thickness - dependent			
Recommended welding angle	0-30° ⁽⁴⁾			
Ideal welding angle	15°			
Laser repeatability	±0.05mm			
Command control	Horizontal touch screen			
Process control	Button on gun			
Maximum consumption of the laser source	3kW			
Automatic wire feeder power	0.2kW			
Maximum power of the equipment	3.5kW			
Average energy consumption (5)	2.1kW			
Working voltage	Single phase: 220V/1ph 50Hz - 60Hz			
Maximum current per line	18 A @ 220VAC 1ph			
	Up to 140°F 60°C			
Required wire gauge for breaker box	2 x 12AWG 2 x 16AWG 220VAC 1ph			
	+1 x 12AWG Ground			
Recommended breaker for the machine	20 A @ 1ph 220VAC			
Power cable length	16.4ft 5m			
Gun cable length	16.4ft 5m			


- 2. The thickness of the weld is related to the amount of material filler that is configured.
- 3. The width of the cut is directly proportional to the thickness of the material, the greater the thickness, the greater the width of the cut.
- **4.** The tilt angle depends on the thickness of the cutting material and also the type of gas being used; the greater the thickness, the more the tilt angle can be affected.
- 5. Average consumption is calculated based on 60% of the power for sizing purposes. Not all components are switched on during operation. The interactions between switching systems such as the chiller and power supply on and off lower this figure. For an hourly electricity consumption calculation, please use the average consumption.




Hose length for feeder thread	16.4ft 5m		
Cooling method	Air cooled		
Gas connection diameter	6mm hose (Nylon)		
Maximum gas inlet pressure	10 bar		
Recommended gas inlet pressure	≤6 bar		
Laser gun weight	0.7kg		
Equipment weight	40kg		
Weight of equipment for transport	45kg		
Equipment dimensions	1.2 x 2.3 x 1.8 ft 350 x 704 x 536 mm		
Automatic feeder measurements	0.8 x 1.8 x 1.3 ft 250 x 560 x 400 mm		
Transport measures	1.7 x 2.9 x 3.2 ft 520 x 870 x 960 mm		
Relative humidity	< 85%		
Working temperature	-10 – 40° C		
Certifications	CE, RoHS		
	Protective glasses for 1060nm		
	KN95 mask		
Required PPE (Not included)	Gloves		
	Gas extraction system		
	Full protective suit (optional)		



Machine Dimensions

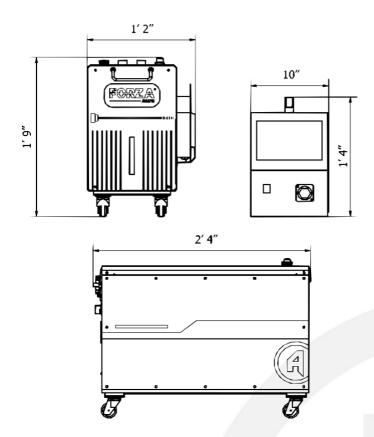

Required Space

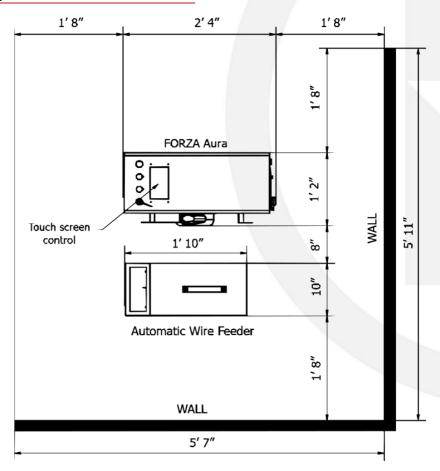

^{*} Peripheral dimensions may vary depending on the machine model



Applicable Materials














Cutting Thicknesses by Material

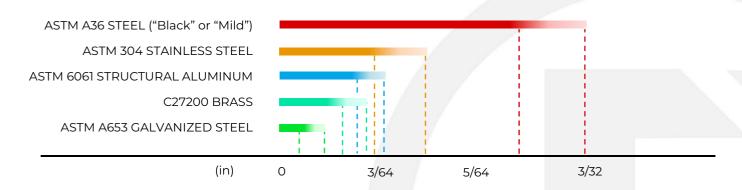

MATERIAL	WELDING			CUTTING		
MATERIAL	mm	in	gauge	mm	in	gauge
ASTM A36 STEEL ("Black or Mild")	2.5	3/32	13	1.5	1/32	16
ASTM 304 STAINLESS STEEL	2.5	3/32	13	1.5	1/32	16
ASTM 6061 STRUCTURAL ALUMINUM	2	5/64	12	1	3/64	18
C27200 BRASS	1	3/64	20	0.5	1/64	27
ASTM A653 GALVANIZED STEEL	1	3/64	20	0.5	1/64	27



Packing List:

- □ 1 x FORZA AURA 800W A4IN1P8 machine (1)
- □ 1 x Multifunction gun SUP-21S
- □ 1 x Laser Source 800W Air cooling
- □ 1 x HMI Touch Screen
- ☐ 1x Integrated CPU
- 🗖 🛮 1 x Clamping Clap 📛

- TOOLBOX -

- □ 1 x Metric Allen key set 🗒
- □ 1 x Phillips screwdriver
- □ 1 x Flathead screwdriver
- □ 1 x Cotton swab case 🗒
- □ 1 x Cleaning cloths 🛱
- □ 1 x Protective Glasses 1080nm 🖺
- □ 1 x QBH Protective cover

- LICENSES -

- □ 1 x FORZA Academy full license 1 year
- □ 1 x Super 7 SUPPORT license 1 years

- PERIPHERALS -

 \square 1 x Automatic thread feeder $\stackrel{\text{\tiny 1}}{\boxminus}$ (2)

- CONSUMABLES -

- ☐ 5 x Protective lens
- □ 7 x Welding/Cutting/Cleaning nozzles 🖺
- ☐ 4 x Wire feeder nozzles

- POWER CABLES AND TRAYS -

- ☐ 5m x WeldFeed control cable 🖺
- ☐ 5m x WeldFeed power cable ☐
- □ 5m x Cable 2x12 AWG + 1x12 AWG, Machine power

 (T:Tip-Plug connection) 🗒

T: Transformer, B: MCCB, E: Stabilizer, M: Machine, F: Laser Source, C: Chiller, H: Head, X: Extractor, G: Ground.

*The reference cables are coated with TW type insulation

Transport symbols: 🖾 (Package), 🖺 (Inside the package), 😂 (Installed on the machine).

ltem	Measures	Net Weight	Gross Weight
匫 (1)	W: 520mm H: 960mm L:950mm	40kg	66kg
匫 (2)	W: 250mm H: 400mm L:560mm	13.2kg	-



Nozzle Kit / Bases:

Picture	Model	Operation	
		FLAT WELDING	
M. H. S	AS-12	INSIDE CORNER	
		For wire 0.8/1/1.2 mm	
		FLAT WELDING	
	BS-16	INSIDE CORNER	
		For wire 1.6mm	
-		WELDING	
	CS-12	OUTSIDE CORNER	
		For wire 0.8/1/1.2 mm	
m a		FLAT WELDING	
	ES-12	OUTSIDE CORNER	
		For wire 0.8/1/1.2 mm	
		FLAT WELDING	
	FS-16	OUTSIDE CORNER	
-0		For wire 1.6 mm	
	С	CORNER WELDING EXTERIOR / CLEANING OF CORD	
	CUTTING NOZZLE	CUTTING	
C 0.8	WIRE NOZZLE	WIRE FEED 0.8	
10	WIRE NOZZLE	WIRE FEED 1.0	
12	WIRE NOZZLE	WIRE FEED 1.2	
100	WIRE NOZZLE	WIRE FEED 1.6	

Consumables:

IMAGE	ITEM	MODEL	DIMENTIONS	LIFETIME
	Protective lens	CF-L18.0X2.0-4K	D:18mm T:2mm	200 hours


Manufactured Parts:









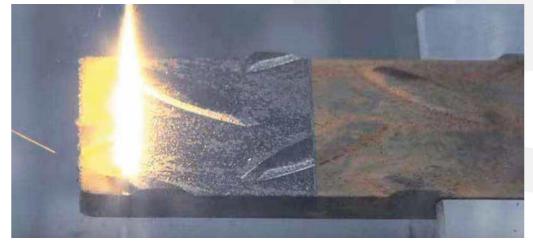



At FORZA Laser, laser specialists, our team has everything you need to take your business to the next level.

Find us on our social media









forzalaser.com

