

Datasheet Model F14PXX





CO2 laser cutting and engraving machine

CUTTING / MARKING / PERFORATION

The FORZA 14 PRO, in its 100W and 130W versions, is a laser cutting and engraving machine designed to excel in industrial environments that demand continuous production, maximum precision, and adaptability.

Designed to work on a wide range of non-metallic materials, it combines high-precision technology with reliable performance, capable of maintaining consistent results even during intensive use.



Main Features

FEATURES	DETAIL
Application	Cutting/Engraving on non-metallic materials
Nominal working area	4.3ft x 3.0ft 1300mm x 900mm
Laser power rating	100W - 130W
Maximum cutting thickness in MDF (1)	19/32in 15mm
Worktable	Lift System (Up-Down)
Bed type	Honeycomb
Maximum XY translation speed	X: 3.3ft/s 1000mm/s
	Y: 1.6ft/s 500mm/s
Cutting precision ⁽²⁾	± 0.1mm

- 1. This is the maximum limit at which a burr-free and clean cut can be obtained. Up to this thickness, cutting can be performed continuously.
- 2. Cutting precision is measured on a ½2in (0.7mm) stainless steel sheet, considering the machine's repeatability and accuracy. A precision of 0.1mm means that when cutting a 3.937in (100.0mm) plate, the actual measurement may be 3.94in(100.1mm) or 3.933in(99.9mm). If the material thickness increases, the error may become greater due to material properties and cut width.






Special Features

Automatic Feeding



It allows different types of connection, either via USB cable, Ethernet, or as an additional upgrade via Wi-Fi. This makes it easy and simple to load designs compatible with the controller.

Protection cover



It includes a protective cover for laser cutting. This ensures safety in the environment and prevents contamination from the smoke produced by the cutting process.

HMI Touch Screen




It has a built-in touch screen as a control interface between the user and the machine. The control is intuitive and user-friendly.

Anti-vibration mechanism



The machine's longest axis of movement (Y axis) uses a rack mechanism, which allows for smooth motion transmission without vibration for optimal and precise work.

Lifting system



The machine has a bed lifting system that allows its height to be adjusted vertically to optimize material positioning and improve work quality.

Included air pump



It incorporates a low-vibration, low-noise pump with high airflow to efficiently remove chips generated during production and provide a better finish.



General Specifications

SPECIFICATION	DETAIL	
Model	FORZA 14 PRO F14PXX	
Laser Type/Technology	Co2 Laser 10.6nm	
Nominal fiber laser power	100W – 130W	
Fiber laser power range	1 a 100%	
Output power stability	± 10%	
Laser working frequency	4 a 5000Hz	
Laser source protection level	IP54	
Laser source model	MYJG 60W – ZYE Laser MYJG 80W – ZYE Laser	
CO2 gas excitation type	Sealed glass tube	
Working modes	CUTTING / MARKING / PERFORATION	
Focusing system	Focus by lens	
Support gases for laser cutting	Air (Integrated pump)	
Mechanical protection system	Limit switch detectors	
Cutting precision ⁽¹⁾	±0.1mm	
XY motion repeatability	±0.01mm	
XY motion accuracy	±0.01mm	
Nominal working range	4.3ft x 3.0ft 1300mm x 900mm	
Z displacement	11.8in 300mm	

^{1.} Cutting accuracy considers the machine's repeatability and accuracy. A 0.1 mm accuracy means that when cutting a 100.0 mm plate, it can measure either 100.1 mm or 99.9 mm. As the material thickness increases, the error can be greater due to the nature of the materials and the width of the cut.



XY axis motion system	Rack and Pinion
Z axis motion system	Worm screw drive
Drive mechanism	Servo motors
Smoke protection system	Enclosed camera
Smoke extraction system	External motors
Laser source power	1kW
Chiller power rating	0.9kW
Fume extractor power rating	1.6kW
Air pump power rating	0.1kW
Motion and control system power	0.4kW
Peak machine power	4kW
Minimum power for electrical system design (2)	3kW
Average energy consumption (3)	1.8kWh
Operating voltage	Single-phase 220V 50Hz-60Hz
Line current	15.2A @ 220VAC 1ph

- 2. The minimum power requirement for electrical sizing is calculated based on the typical power ratings of the laser source and the chiller, plus half the power of the fume extractor and the machine's actuators.
- 3. The average consumption is estimated at 60% of the peak consumption, as not all components remain powered during operation. The on/off cycles of systems such as the chiller and the laser source reduce this value. For calculating hourly electrical consumption, use the average consumption figure.



Conductor wire gauge to the thermal- magnetic circuit breaker (MCCB) ⁽⁴⁾	Up to 140°F 60°C (TW, UF)	Up to 194°F 90°C (THHW, THHN)	Voltage
	3 x 12AWG	3 x 14AWG	220VAC 1ph
Recommended MCCB and grounding conductor	МССВ	PE Conductor (Copper)	Voltage
Conductor	20A	12AWG	220VAC 1ph
Required Voltage Regulator (5)	5000 VA		
Controller	RUIDA RDC		
Communication Type	USB, ETHERNET, WIFI (optional)		
Compatible Design Formats	DSP, PLT, BMP, DXF, AI		
Control Interface	HMI touchscreen		
PC Operating Software ⁽⁶⁾	RDworks		
Software Language	English and Spanish		
PC Control Interface	Via touchscreen and manual control		
Cooling Method	Water-cooled		
Chiller Tank Capacity	2.4gal 9L		
Airflow Delivered by Pump	14.53 gal/min 55 L/min		
Equipment Weight	0.3ton 300kg		
Shipping Weight	0.5ton 500kg		
Equipment Dimensions	5.9ft x 4.4ft x 3.4ft 1803mm x 1350mm x 1030 mm		
Shipping Dimensions	6.4ft x 4.9ft x 3.64ft 1940mm x 1485mm x 1110mm		
Relative Humidity	< 90%		
Operating Ambient Temperature	20 - 28 °C		
Storage Temperature	10 - 40 °C		
Certifications	CE, RoHS, FCC		


- 4. Cable gauge sizing was determined based on Table 310-15(b)(16) of the NOM-001-SEDE standard, for maximum conductor temperatures of 60 °C and 90 °C, respectively, assuming conduit installation. For open-air cable installation, a smaller gauge than the one specified in this document may be used, subject to prior consultation with the FORZA Laser technical department.
- 5. For equipment installation, it must be connected to a voltage regulator of at least 5000 VA. This regulator is not included with the machine.
- **6.** An additional computer (not included with the machine) is required to install the necessary software for operating the equipment.



CUTTING AND ENGRAVING MATERIALS			
Wood	Balsa		
Acrylic	Flexible Foam		
Polyethylene	Foamy		
Rubber	Fabric		
Synthetic Leather	Paper		

ENGRAVING MATERIALS			
Anodized Aluminum	Granite		
Stone	Bone		
Marble	Bamboo		
Glass	Wood		
Plastics	Tagua		

Cutting Thicknesses by Material

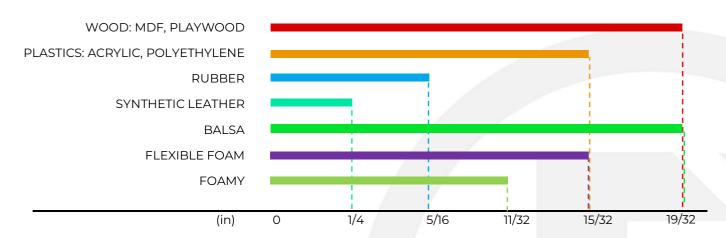

MATERIAL	NOMINAL THICKNESS		
MAIERIAL	in	mm	
Wood: mdf, playwood	19/32	15	
Plastics: acrylic, polyethylene	15/32	12	
Rubber	5/16	8	
Synthetic leather	1/4	6	
Balsa	19/32	15	
Flexible foam	15/32	12	
Foamy	11/32	9	
Fabric: Polyester, Nylon, Cotton	Various thicknesses		
Paper	Various thicknesses		

NOTA: The machine must not be used with materials that emit harmful gases to health or that may damage the machine. For example: PVC, fiberglass, resins, polycarbonate, epoxy, ABS.



Packing List:

- ☐ 1 x FORZA 14 PRO machine 100W 130W 🖾 (1)
- ☐ 1 x Assembly Kit for Cable Trays and Rails ☐
- ☐ 1 x Laser Safety Glasses with Case ☐
- □ 2 x Waste collection cart set 🗒
- ☐ 6 x Machine leveling feet 🛱
- 🔲 🛾 1 x HMI touchscreen display 🟥
- 🔲 🛮 1 x FORZA welcome sign 🖼

- TOOLBOX -

- □ 1 x Plastic Tool Box
- □ 2 x 6" Clamps 🖺
- □ 1 x Masking Tape
- ☐ 1 x Metric Allen Key Set
- □ 1 x Plastic Funnel 🛱
- ☐ 1 x Fabric Cleaning Cloth 🖺
- ☐ 1 x Pack of Lens Cleaning Wipes 🗒
- □ 1 x Lens Removal Tools 🗒

- CONSUMABLES -

□ 1 x CO2 Laser lens set 🗒

- PERIPHERALS -

- □ 1 x Automatic Cooler (Chiller)
- □ 3 x Industrial Fume Extractors 550W 🖺
- □ 1 x Automatic Feeding System

- LICENSES -

- ☐ 1 x Software License
- ☐ 1 x FORZA Vectors license 1 year
- ☐ 1 x FORZA Academy full license 1 year
- ☐ 1 x Super 7 SUPPORT license 4 years

- POWER CABLES AND TRAYS -

- 🔲 🛾 1 x Gas Extraction Tube/Hose 2m x 6" 🖺
- □ 1 x FORZA 14 PRO Power Cable 🗒
- ☐ 1 x USB to USB Cable
- □ 1 x Ethernet Network Cable 🛱
- □ 2 x PU Hoses for CO2 Tube Cooling

*The reference cables are coated with TW type insulation

Transport symbols: 🚾 (Package), ै (Inside the package), ै (Installed on the machine).




Consumables:

IMAGE	ITEM	MODEL	DIMENTIONS	LIFETIME
	CO2 Laser lens	CO-LDXXFXXX	Diameter (D) and Focal Length (F) vary by model	200 hours
	Distilled water	xxxx	2.4gal / 9L	2 months
	Blue grease for pinions	xxxx	Lithium grease	6.21 miles 10 000 meters



Manufactured Parts:

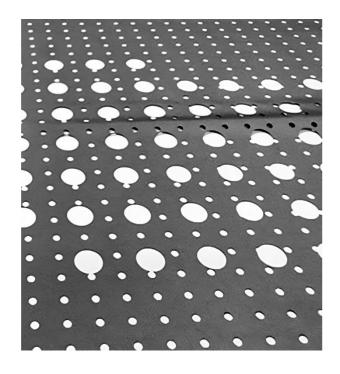











At FORZA Laser, laser specialists, our team has everything you need to take your business to the next level.

Find us on our social media









forzalaser.com

